


Polywater[®] SqueekyKleen[™]

COMMUNICATIONS CLEANER



NEW!

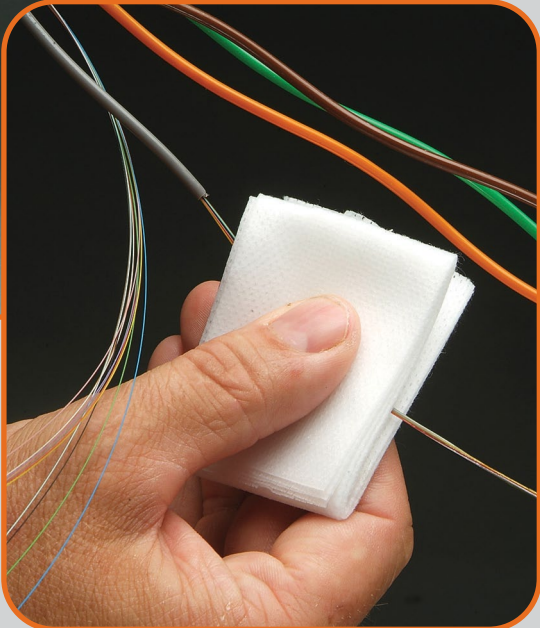

- Cleans off pik without the use of alcohol
- Minimal wiping (2 wipes only)
- No residue
- Safe to use on ribbon fiber
- Fans fiber quickly
- Cleans fiber squeaky clean

American
Polywater[®]
Corporation

View the SqueekyKleen[™] flyer online at www.polywater.com/squeekykleen.asp



For more information or to place an order,
please contact Supply Solutions at
866-978-7759. Courtesy of Polywater Corp.

POLYWATER® **SqueeKleen™** COMMUNICATIONS CLEANER

New SqueeKleen™ cleans and fans fiber in two wipes without alcohol, saving time and money. Hear the difference! No follow-up with alcohol required to get fibers squeaky clean and separated for fast and easy splicing. SqueeKleen™ is less harsh on hands and reduces chemical odors and harmful vapor concentrations in splice trailers and vaults.

SqueeKleen's unique formulation and specially designed high-performance towelette work to remove pik from the entire surface of loose tube or ribbon fibers, leaving no residue. SqueeKleen™ helps keep splice equipment clean for better fiber alignment and splice quality. Will not harm acrylate on loose tube cables or mylar® on ribbon fiber.

SPECIFICATIONS

Cleaning: When wiping a 3-foot section of 12-count fiber from a buffer tube, the pre-saturated towel will squeak and fan fibers with 2 wipes.

Water Content: When tested by the ASTM 1533B method, water content shall be less than 75 ppm.

Solvency Power: At 68° F (20° C), will dissolve .020" (.5mm) film of PE/PJ or ETPR grease completely from cable jacket with less than two minutes of vigorous agitation (no wiping).

Flash Point: When tested via a Pensky-Martin Closed Cup Test (ASTM D93), the cleaner shall have a flash point above 140° F.

Residue: When placed on a clean glass panel and dried, the solvent shall not leave any visible residue (<100 ppm).

CATALOG NUMBER	DESCRIPTION	STANDARD SHIPPING PACKAGE
TC-1	Single-use towelette	144/case
TC-D65	Dispenser with 65 10" x 12" premoistened towelettes	6/case
TC-D65DRY	Dispenser with 65 10" x 12" non-linting towelettes	6/case
TC-16LF	1-pint bottle with flip top	12/case
TC-16LR	1-pint bottle with spray trigger	12/case
TC-35LF	1-quart bottle with flip top	12/case
TC-35LR	1-quart bottle with spray trigger	12/case
TC-128	1-gallon jug	4/case
TC-384	3 gallons in 5-gallon pail	1
TC-640	5-gallon pail	1

View the SqueeKleen™ flyer online at <http://www.polywater.com/squeekleen.asp>

Copyright ©2007. American Polywater Corporation. All Rights Reserved

IMPORTANT NOTICE: The statements here are made in good faith based on tests and observations we believe to be reliable. However, the completeness and accuracy of the information is not guaranteed. Before using, the end-user should conduct whatever evaluations are necessary to determine that the product is suitable for the intended use.

American Polywater expressly disclaims any implied warranties and conditions of merchantability and fitness for a particular purpose. American Polywater's only obligation shall be to replace such quantity of the product proven to be defective. Except for the replacement remedy, American Polywater shall not be liable for any loss, injury, or direct, indirect, or consequential damages resulting from product's use, regardless of the legal theory asserted.

Lit-TCFlyer/07-07/GH/(10-09)



P.O. Box 53
Stillwater, MN 55082
U.S.A

1-800-328-9384
custserv@polywater.com (e-mail)
http://www.polywater.com (URL)

1-651-430-2270
fax 1-651-430-3634

For more information or to place an order, please contact Supply Solutions at 866-978-7759. Courtesy of Polywater Corp.