


“W” & “G” Series
Three Piece Splices



Connectors to join two identical cables together. Auto seize technology incorporated in both connector ends assures best possible connection. Three piece design allows visual inspection of connector and cable during installation. Common hex size per connector with tapered back nut for consistent heat shrink application. Connectors are re-enterable and reusable with integrated center conductor cutting guide.

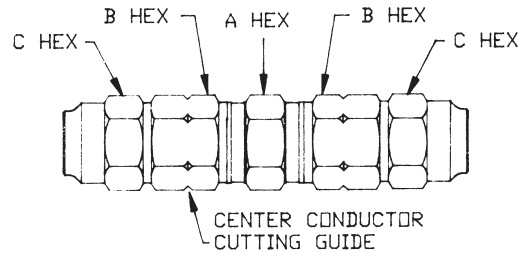

For more information or to place an order, please contact Supply Solutions at 866-978-7759.

PDF courtesy of Thomas & Betts.

Ordering Information

| CABLE TYPE | CATALOG NUMBER | CENTER COND | CABLE OD | DIMENSIONS | | | INNER PACK | OUTER PACK |
|-----------------------|----------------|-------------|-------------|--------------|--------------|--------------|------------|------------|
| | | | | A | B | C | | |
| P3 & T10 | SFI412W3 | .092 | .412 | 15/16 | 15/16 | 15/16 | 25 | 100 |
| | SFI500W3 | .109 | .500 | 1 | 1 | 1 | 20 | 80 |
| | SFI625W3 | .137 | .625 | 1-1/8 | 1-1/8 | 1-1/8 | 16 | 64 |
| | SFI750W3 | .167 | .750 | 1-3/16 | 1-3/16 | 1-3/16 | 14 | 56 |
| | SFI875W3 | .194 | .875 | 1-1/2 | 1-1/2 | 1-1/2 | 9 | 36 |
| | SFI1000W3 | .220 | 1.000 | 1-3/4 | 1-3/4 | 1-3/4 | 6 | 24 |
| QR | SFI540QRG | .124 | .610 | 1-1/8 | 1-1/8 | 1-1/8 | 16 | 64 |
| | SFI715QRG | .166 | .785 | 1-3/16 | 1-3/16 | 1-3/16 | 9 | 36 |
| | SFI860QRG | .203 | .960 | 1-1/2 | 1-1/2 | 1-1/2 | 9 | 36 |
| | SFI1125QRG | .263 | 1.225 | 1-3/4 | 1-3/4 | 1-3/4 | 6 | 24 |
| TX | SFI565TX | .129 | .565 | 1-1/8 | 1-1/8 | 1-1/8 | 16 | 64 |
| | SFI700TX | .163 | .703 | 1-3/16 | 1-3/16 | 1-3/16 | 14 | 56 |
| | SFI840TX | .194 | .840 | 1-1/2 | 1-1/2 | 1-1/2 | 9 | 36 |
| MC² | SFI440MC2 | .105 | .450 | 15/16 | 15/16 | 15/16 | 25 | 100 |
| | SFI500MC2 | .123 | .510 | 1 | 1 | 1 | 20 | 80 |
| | SFI650MC2 | .156 | .640 | 1-1/8 | 1-1/8 | 1-1/8 | 16 | 64 |
| | SFI750MC2 | .185 | .760 | 1-3/16 | 1-3/16 | 1-3/16 | 9 | 36 |
| | SFI1000MC2 | .248 | 1.015 | 1-3/4 | 1-3/4 | 1-3/4 | 6 | 24 |
| P1 | SFI412W | .080 | .412 | 15/16 | 15/16 | 15/16 | 25 | 100 |
| | SFI500W | .100 | .500 | 1 | 1 | 1 | 20 | 80 |
| | SFI750W | .148 | .750 | 1-3/16 | 1-3/16 | 1-3/16 | 14 | 56 |
| | SFI1000W | .193 | 1.000 | 1-3/4 | 1-3/4 | 1-3/4 | 6 | 24 |
| P2 | SFI412W2 | .092 | .412 | 15/16 | 15/16 | 15/16 | 25 | 100 |
| | SFI500W2 | .111 | .500 | 1 | 1 | 1 | 20 | 80 |
| | SFI750W2 | .169 | .750 | 1-3/16 | 1-3/16 | 1-3/16 | 14 | 56 |

QR IS A TRADEMARK OF COMMScope, INC.

TX & T10 ARE TRADEMARKS OF TIMES FIBER COMMUNICATIONS

MC² IS A TRADEMARK OF TRILOGY