


“W” & “G” Series
Three Piece Splices



Connectors to join two identical cables together. Auto seize technology incorporated in both connector ends assures best possible connection. Three piece design allows visual inspection of connector and cable during installation. Common hex size per connector with tapered back nut for consistent heat shrink application. Connectors are re-enterable and reusable with integrated center conductor cutting guide.

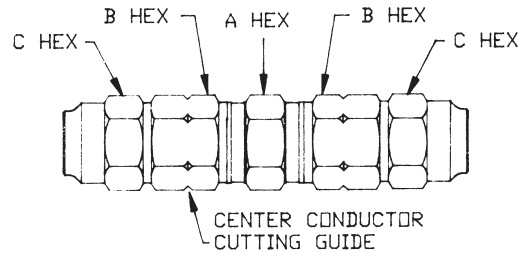

For more information or to place an order, please contact Supply Solutions at 866-978-7759.

PDF courtesy of Thomas & Betts.

Ordering Information

CABLE TYPE	CATALOG NUMBER	CENTER COND	CABLE OD	DIMENSIONS			INNER PACK	OUTER PACK
				A	B	C		
P3 & T10	SFI412W3	.092	.412	15/16	15/16	15/16	25	100
	SFI500W3	.109	.500	1	1	1	20	80
	SFI625W3	.137	.625	1-1/8	1-1/8	1-1/8	16	64
	SFI750W3	.167	.750	1-3/16	1-3/16	1-3/16	14	56
	SFI875W3	.194	.875	1-1/2	1-1/2	1-1/2	9	36
	SFI1000W3	.220	1.000	1-3/4	1-3/4	1-3/4	6	24
QR	SFI540QRG	.124	.610	1-1/8	1-1/8	1-1/8	16	64
	SFI715QRG	.166	.785	1-3/16	1-3/16	1-3/16	9	36
	SFI860QRG	.203	.960	1-1/2	1-1/2	1-1/2	9	36
	SFI1125QRG	.263	1.225	1-3/4	1-3/4	1-3/4	6	24
TX	SFI565TX	.129	.565	1-1/8	1-1/8	1-1/8	16	64
	SFI700TX	.163	.703	1-3/16	1-3/16	1-3/16	14	56
	SFI840TX	.194	.840	1-1/2	1-1/2	1-1/2	9	36
MC²	SFI440MC2	.105	.450	15/16	15/16	15/16	25	100
	SFI500MC2	.123	.510	1	1	1	20	80
	SFI650MC2	.156	.640	1-1/8	1-1/8	1-1/8	16	64
	SFI750MC2	.185	.760	1-3/16	1-3/16	1-3/16	9	36
	SFI1000MC2	.248	1.015	1-3/4	1-3/4	1-3/4	6	24
P1	SFI412W	.080	.412	15/16	15/16	15/16	25	100
	SFI500W	.100	.500	1	1	1	20	80
	SFI750W	.148	.750	1-3/16	1-3/16	1-3/16	14	56
	SFI1000W	.193	1.000	1-3/4	1-3/4	1-3/4	6	24
P2	SFI412W2	.092	.412	15/16	15/16	15/16	25	100
	SFI500W2	.111	.500	1	1	1	20	80
	SFI750W2	.169	.750	1-3/16	1-3/16	1-3/16	14	56

QR IS A TRADEMARK OF COMMScope, INC.

TX & T10 ARE TRADEMARKS OF TIMES FIBER COMMUNICATIONS

MC² IS A TRADEMARK OF TRILOGY