

INSULATE  
SEAL  
PROTECT

3:1  
SHRINK RATIO



## HEAT SHRINK CABLE SLEEVES

HEAT SHRINK TUBING AND ADHESIVE LINER COMBINATION THAT ESTABLISHED THE CATV INDUSTRY STANDARD FOR SPLICE AND CONNECTOR PROTECTION

### FEATURES AND BENEFITS


- Craft friendly installation
- Exceptional split resistance
- CFTV adhesive retains bond providing long term protection
- Selective strippability to meet CATV industry specifications
- Minimal heat required to produce error free installation without splitting
- Thermochromatic lines change colour to signal waterproof seal
- Shrinks and seals in half the time of alternative products
- Shrink ratio: 3:1
- Continuous operating temperature: -55°C to 110°C

### TYPICAL APPLICATIONS

- Strain relief of coaxial connectors
- Waterproof protection of CATV connectors




For more information or to place an order,  
please contact Supply Solutions at  
866-978-7759.  
Courtesy of Canusa.

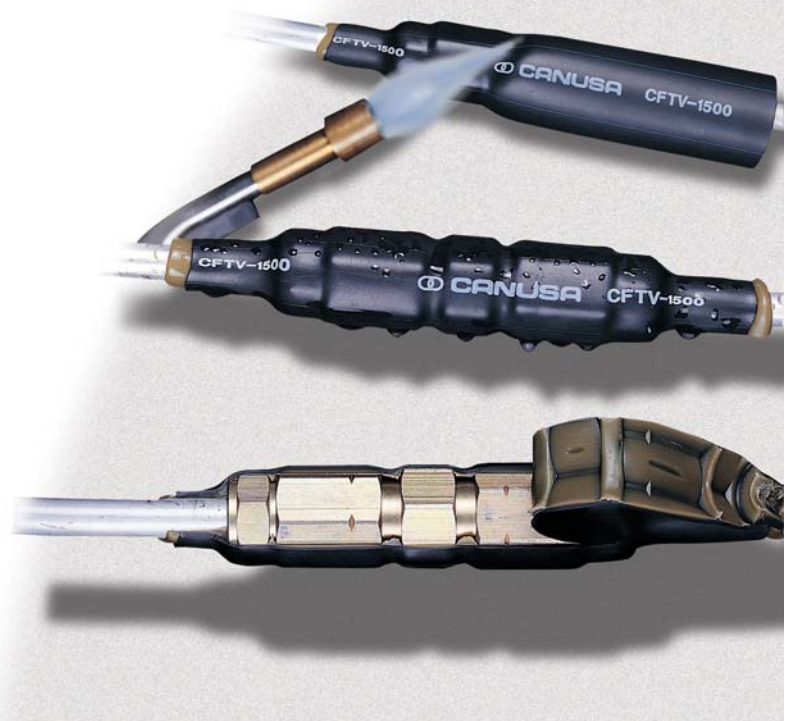

## DIMENSIONS

ORDER NUMBER	EXPANDED		RECOVERED				APPLICATION RANGE FOR GENERAL USE		LENGTHS	
	INTERNAL DIAMETER (MIN.) D		INTERNAL DIAMETER (MAX.) d		WALL THICKNESS (NOM.) W		MM	IN	M	IN
	MM	IN	MM	IN	MM	IN				
0400	10.2	0.40	3.8	0.15	2	0.08	4.5 - 8.5	.18 - .34	1.2	48
0750	19.0	0.75	5.6	0.22	2	0.08	6.0 - 16.5	.24 - .65	1.2	48
1100	27.9	1.10	10.2	0.40	2	0.08	11.5 - 25.0	.45 - 1.0	1.2	48
1300	33.0	1.30	10.2	0.40	2	0.08	11.5 - 30.0	.45 - 1.2	1.2	48
1500	38.1	1.50	12.7	0.50	2	0.08	14.0 - 35.0	.55 - 1.4	1.2	48
1700	43.2	1.70	12.7	0.50	2	0.08	14.0 - 40.0	.55 - 1.6	1.2	48
2050	52.1	2.05	19.0	0.75	2	0.08	21.0 - 45.0	.82 - 1.8	1.2	48
2750	69.8	2.75	25.4	1.00	2	0.08	30.0 - 63.0	1.2 - 2.5	1.2	48

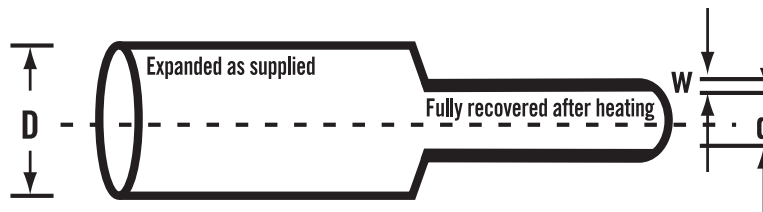

For more information or to place an order, please contact Supply Solutions at 866-978-7759. Courtesy of Canusa.

## ORDERING

- Select a dimension which will shrink snugly over the component to be covered. If recovery is restricted the resulting wall thickness will be less than specified.
- Order Example: CFTV, 1700

Please contact your Customer Service Representative for information on custom sizes, lengths and material data sheet.

All information contained in this data sheet is believed to be reliable. We advise, however, that customers should separately evaluate the suitability of our products for their particular application. DSG-Canusa and ShawCor give no guarantees in respect of the accuracy or sufficiency of the information presented and disclaim any liability regarding its use. Our responsibilities are only those listed in our Standard Terms and Conditions of Sale for these products. In no instance will we be liable for any eventual, indirect or consequential damage or damages arising from the sale, resale, transfer, use or misuse of the product.